65CM 3 ZONE PERFECT SENSOR INDUCTION HOB DP17570XT



- Perfect Sensor probe
- 3 zones
- Intelligent touch control with digit display
- 19 power levels
- Booster
- 3 x independent timers
- Recall function
- 6 x sensor probe programs
- 10 safety features:
 - Residual heat indicator
 - Small object safety
 - Anti overflow
 - Autostop® system
 - Keypad lock
 - Automatic saucepan detection
 - Temperature limiter
 - ➤ Low voltage, Connection error, Over Tension







Cooking Zones	#1	#2	#3
Position of zone	Front left	Rear left	Center right
Size of zone (mm)	160	230	280
Power (W)	2400	3700	3700

65CM 3 ZONE PERFECT SENSOR INDUCTION HOB DPI7570XT



Perfect Sensor

- •There are three ways of using the perfect sensor probe
- 1. View the temperature measured in the dish directly on the hob's display.
- 2. Programme a temperature setpoint to be reached in the dish (Expert mode)
- 3.Set the temperature thanks to the 6 cooking functions proposed.
- •With the help of connected probe, the hob indicates in real time and to the nearest degree the temperature measured in your dish.
- •Sensor probe detects temperature from 5°C 180°C.



- > C1 Expert mode
- > C2 Melt
- > C3 Vacuum cooking (Sous Vide)
- > C4 Warm
- > C5 Slow Cooking
- ➤ C6 Boil

•Pairing:

- ➤ Pairing takes place only once when using the sensor for the first time or when replacing it.
- >Once confirmed, sensor light will turn blue.
- >Pairing only in needs to be done once.







65CM 3 ZONE PERFECT SENSOR INDUCTION HOB DPI7570XT



Electronic Connections

Total power for connections: 7400W

• Current: 32amps

Voltage: 220V – 240V

Frequency: 50 / 60Hz

Length of electrical supply cord: 130cm

• Type of plug: Not applicable

Dimensions


- Dimensions of overall product (mm): H68 x W650 x D515
- Built in dimensions (mm): W560 x D490
- Fully flushed dimensions (mm): W653 x D518
- Net weight (kg): 11.5
- Gross weight (kg): 12

65CM 3 ZONE PERFECT SENSOR INDUCTION HOB DPI7570XT



Installation Diagram

Built in dimensions

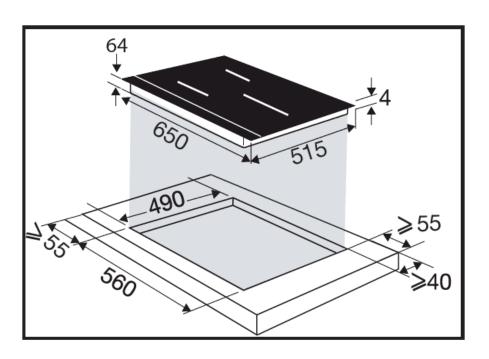

Fully flushed dimensions

